


Normal Drilling Spacing Unit

1-Normal oil drilling spacing unit will be a quadrant of a section made of four contiguous units. (A, B, G & H), (C, D, E & F), (K, L, M, & N), or (I, J, O & P)

2-Normal gas drilling spacing unit will be a complete section made of sixteen units from A to P.

**Schedule (3)
Part (A)**

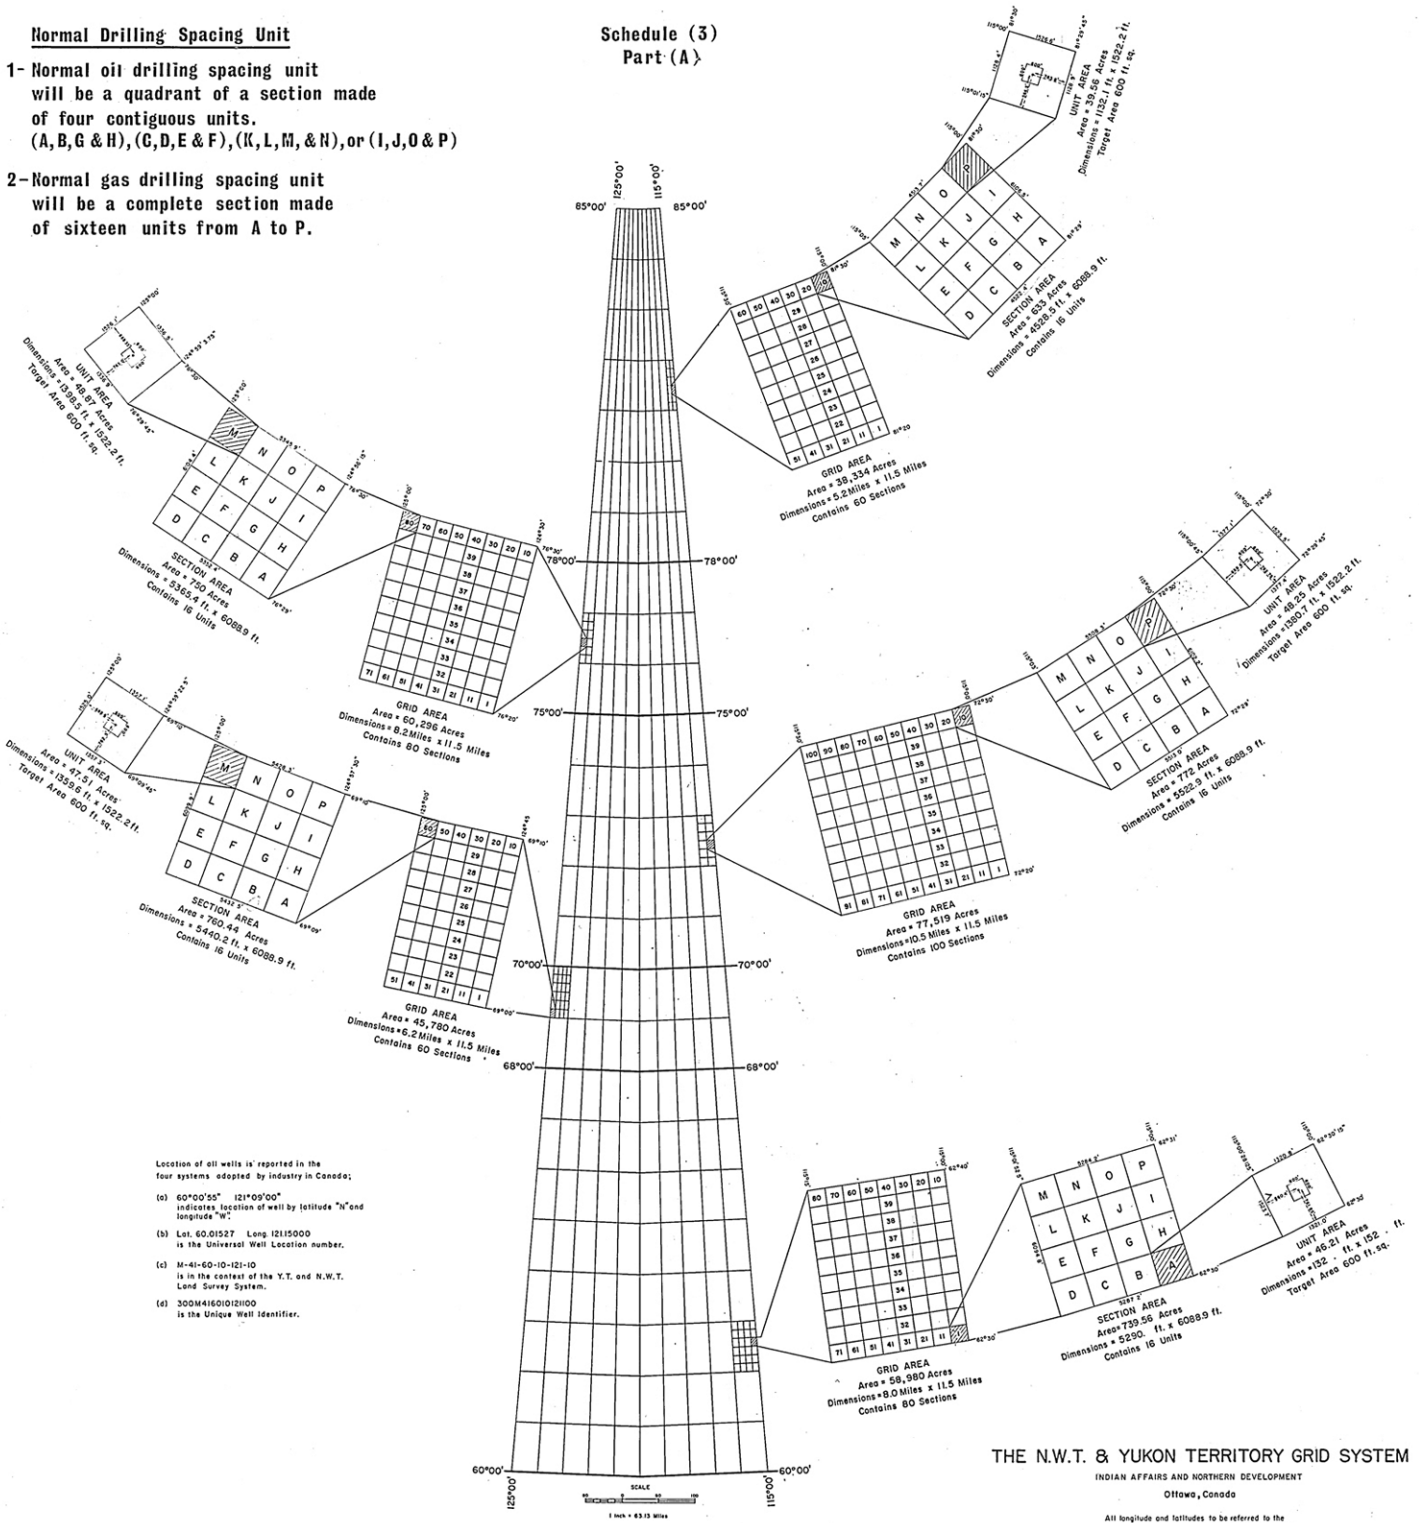

THE N.W.T. & YUKON TERRITORY GRID SYSTEM
INDIAN AFFAIRS AND NORTHERN DEVELOPMENT
Ottawa, Canada

All longitude and latitudes to be referred to the North American Datum of 1927 and each grid area to be known by the longitude and latitude of its northeastern corner. For further information refer to Section 37 of the Canada Oil & Gas Regulations April 3, 1957.